
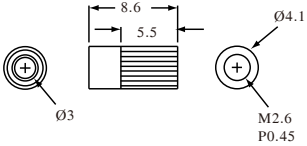

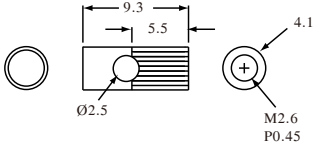

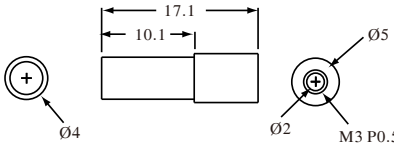

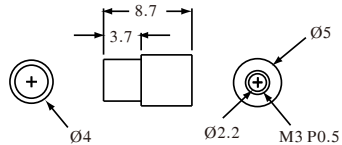

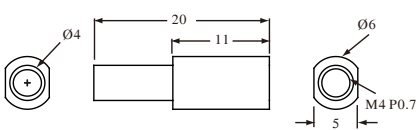

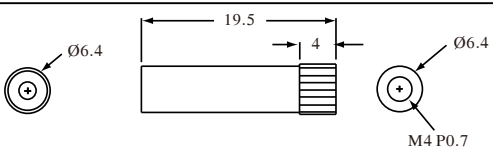


LENS / 聚焦鏡

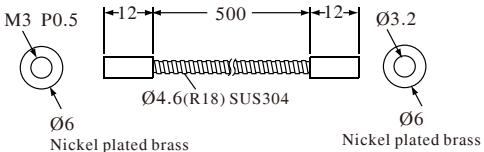
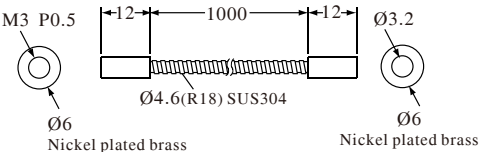
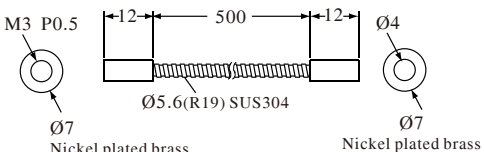
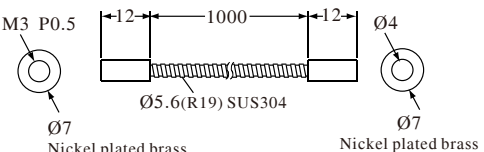
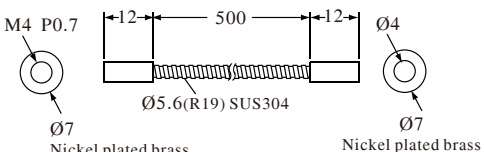
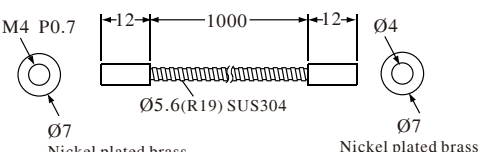
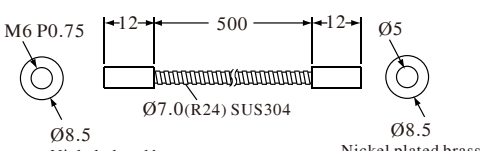
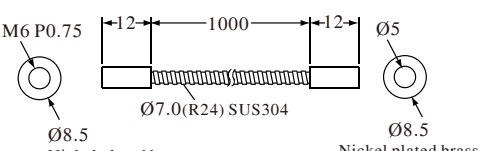
Product Map	Dimensions	Product Map	Dimensions
 <p>FL-M02</p>	 <p>FT fiber type Scanning distance is increased 4 times if this FLM-02 unit is attached to the light emitter and receiver of a thru - scan fiber unit.</p>	 <p>FLS-M02</p>	 <p>FT-410 unit can be changed to aside view type by attaching this unit to the light emitter or receiver of fiber unit.</p>
 <p>FL-M03</p>	 <p>Light converges to a spot diameter of 0.5mm if this unit is attached to a fiber unit at a distance of 8mm.</p>	 <p>FL-M03-1</p>	 <p>Light converges to a spot diameter of 2mm if this unit is attached to a fiber unit at a distance of 8mm.</p>
 <p>FL-M04</p>	 <p>Light converges to a spot diameter of 0.7mm if this unit is attached to a fiber unit at a distance of 10mm.</p>	 <p>FL-M06</p>	 <p>FTX-410 Scanning distance is increased 8 times if this unit is attached to the light emitter and receiver of a thru - scan fiber unit.</p>

Heat resistant adapter / 高溫轉接頭

Fiber Cutter / 光纖切刀

 <p>FTG015-05041</p>  <ol style="list-style-type: none"> Suitable for High Temperature and Vacuum Environment Operating Temperature: -40°C ~ 250°C Effective against Air under Vacuum Sensing. Connected to a Plastic Fiber Sensor Applied in High Temperature Environment 	 <p>C4530</p> 
--	--

Protective tube / 保護管

Dimensions	Dimensions
<p>RS3N3-50</p>  <p>Ø4.6(R18) SUS304 Nickel plated brass</p>	<p>RS3N3-100</p>  <p>Ø4.6(R18) SUS304 Nickel plated brass</p>
<p>RS4N3-50</p>  <p>Ø5.6(R19) SUS304 Nickel plated brass</p>	<p>RS4N3-100</p>  <p>Ø5.6(R19) SUS304 Nickel plated brass</p>
<p>RS4N4-50</p>  <p>Ø5.6(R19) SUS304 Nickel plated brass</p>	<p>RS4N4-100</p>  <p>Ø5.6(R19) SUS304 Nickel plated brass</p>
<p>RS5N6-50</p>  <p>Ø7.0(R24) SUS304 Nickel plated brass</p>	<p>RS5N6-100</p>  <p>Ø7.0(R24) SUS304 Nickel plated brass</p>